


Installation Guide

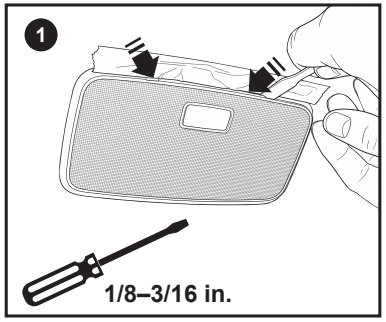


Prepare a flat-head screwdriver with a blade width between 1/8 in. and 3/16 in.
Before installation, make sure the vehicle is turned off. Apply a piece of tape along the lamp cover for protection. Insert a screwdriver into the gap and gently pry up to remove the lamp cover.

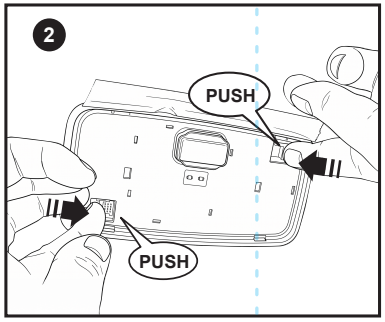


Press the clips on both sides to remove the dome light.

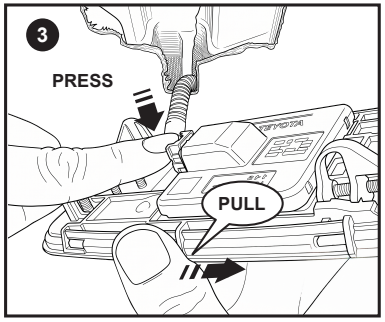

Press and hold the connector latch on the power cable, then remove the lamp.

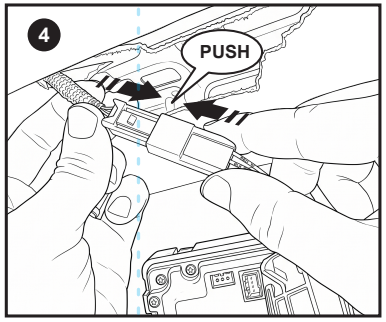


Connect the power cable to the Guardian Halo.
Once properly connected, pressing the button will turn on the white light, and the orange indicator will display a breathing effect.

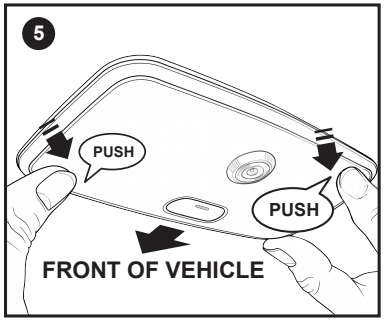

Make sure the button is facing the front of the vehicle, then install the unit into the headliner.
Store the original lamp in a safe place.

Product Overview

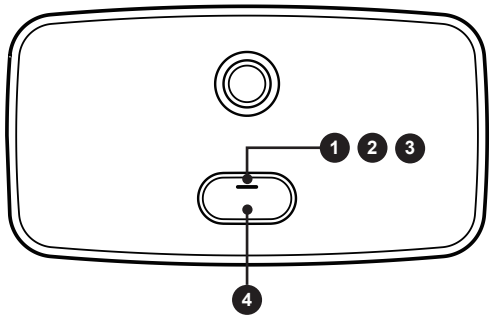

1. **Status LED** —
2. **Breathing Light: Standby Mode** ☀ ☀
3. **Blinking Light: Connected** ☀
4. **Dome Light Button** ⊖

Connecting to the APP

1. **Download the App and Register an Account**
   Please search for “Guardian Halo” in the iOS App Store or Google Play, then download and install the app. Open the app and register an account.

2. **Scan the Product SN to Add a Device**
   Use the app to scan the product serial number (SN) to add the device.

3. **Confirm the Device is in breathing mode**
   Unlock the vehicle and open a door. Confirm that the indicator light is on and showing the breathing effect.

4. **Connect via Wi-Fi**
   Scan the QR code label on the accessory to connect to the Guardian Halo Wi-Fi.
   Alternatively, go to your phone’s Wi-Fi settings and connect to “Guardian Halo XXXX”.
   (The numbers represent the MAC address and are unique for each device.)
   Enter the password shown on the QR code label.
   Once successfully connected, the indicator light will blink.


5. **Set the Device Security Password**
   Set a security password for the device.
   If you forget the password, you can check it on the Settings page.

iOS **Google play**

App Instructions

Please refer to the in-app instructions for more details.

Guardian Halo

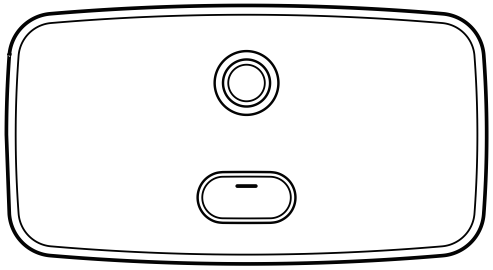

VIGORPLUS+

Other Language Manuals

FCC Certification

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1) This device may not cause harmful interference, and
(2) this device must accept any interference received, including interference that may cause undesired operation.

Warnings

This product is NOT a substitute for adult supervision.
This product is compatible with TOYOTA RAV4 5th Generation (2021–2025) and 6th Generation (2026) vehicle models.
The transmission of radio equipment is in vehicle use only.

Technical Specifications

Item	Specification
Product	Guardian Halo
Model	GHA01
Rated Input	DC 12V @ 2A
Applicable voltage range	DC 9V ~ DC 16V
Quiescent current	Typical 6.6mA, Max. 10mA @ 12V input
Camera Resolution	Full HD (1920 x 1080 pixels)
Support System	iOS 13 and Android 9.0 or later
Product Dimensions	155mm x 83mm x 39mm
Operating Temperature	-10˚C to + 60˚C

Contact Us:

Email: service@vigorplus-design.com
Website: https://halo.vigorplus-design.com/